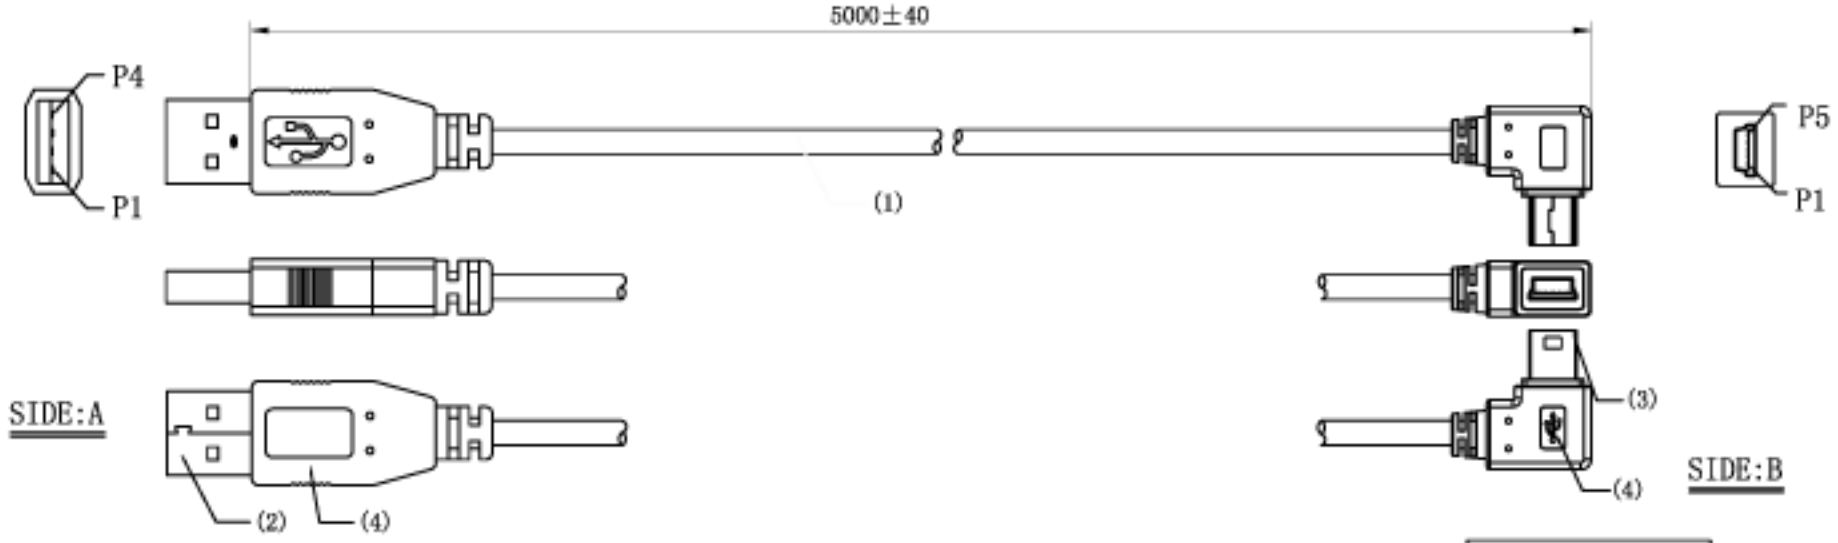

NOTE:

(1). Cable Spec: UL2725 28AWG(7/0.12mmCu)*1P+24AWG(7/0.20mmCu)*2C+
D(7/0.12CU) +Al-foil+B[16*3 (0.12) ALMG]
Jacket Material:PVC OD:4.5±0.2mm
Cable Colour: Black
Cable Printing: USB 2.0 CABLE FULLY RATED

(2). Connector A: USB 2.0 A Male Solder Type
INSULATION:Black
CONTACTS:Phosphor Bronze, Gold Plated
SHELL:Brass, Nickel Plated

(3). Connector B: MINI 5PIN Male Solder Type
INSULATION:Black
CONTACTS:Phosphor Bronze, Gold Plated
SHELL:Brass, Nickel Plated

(4). Over Molding colour: PVC-45P-Black

(5). Parameter Settings: CT-8681FA
1. Conductive Resistance:2.5Ω
2. Insulative Resistance:5MΩ(Min.)
3. 250V/AC、DC ,1.5mA/1 ,50Hz ,0.03s

(6). Packing: POLYBAG Packing

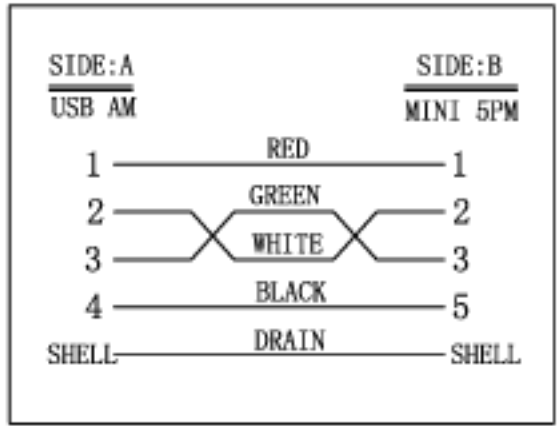

PIN OUT:(5)

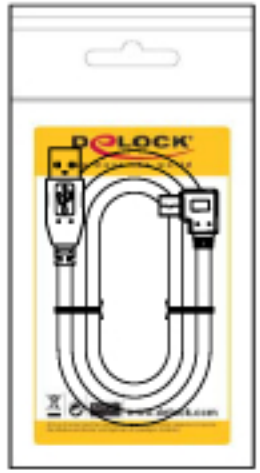

PACKING:(6)

REV	DESCRIPTION	DATE
0		2010/06/25

GENERAL TOLERANCES (UNLESS SPECIFIED)

LENGTH: X. ±1
.X±0.2
.XX±0.10
ANGLE: X° .±1°
.X° ±0° 30'

82684

UNIT:mm	REV:0/A				NAME	USB 2.0 AM/MINI 5PM
DRAWING	OYF	2010/06/25	S.P.NO.			
CHECK			P.O.NO.		DWG.NO.	
APPROVE			SIZE		PAGE	1/1